

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com


ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



FJD3076

Power Amplifier Applications

Low Collector-Emitter Saturation Voltage



1. Base 2. Collector 3. Emitter

NPN Epitaxial Silicon Transistor

Absolute Maximum Ratings $T_C=25^{\circ}C$ unless otherwise noted

Symbol	Parameter	Value	Units	
V _{CBO}	Collector-Base Voltage	40	V	
V _{CEO}	Collector-Emitter Voltage	32	V	
V _{EBO}	Emitter-Base Voltage	5	V	
I _C	Collector Current	2	Α	
P _C	Collector Dissipation (T _a =25°C)	1	W	
	Collector Dissipation (T _C =25°C)	10	W	
T _J	Junction Temperature	150	°C	
T _{STG}	Storage Temperature	- 55 ~ 150	°C	

Electrical Characteristics T_C=25°C unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Тур.	Max.	Units
BV _{CEO}	Collector-Emitter Breakdown Voltage	$I_{C} = 1 \text{mA}, I_{B} = 0$	32			V
BV _{CBO}	Collector-Base Breakdown Voltage	$I_C = 50\mu A$	40			V
BV _{EBO}	Emitter-Base Breakdown Voltage	$I_E = 50\mu A$	5			V
I _{CBO}	Collector Cut-off Current	$V_{CB} = 20V, I_{E} = 0$			1	μΑ
I _{EBO}	Emitter Cut-off Current	$V_{EB} = 4V, I_{C} = 0$			1	μΑ
h _{FE}	DC Current Gain	$V_{CE} = 3V, I_{C} = 0.5A$	130		390	
V _{CE} (sat)	Collector-Emitter Saturation Voltage	$I_C = 2A, I_B = 0.2A$		0.5	0.8	V
f _T	Current Gain Bandwidth Product	$V_{CE} = 5V, I_{E} = -0.5A,$ f = 100MHz		100		MHz
C _{ob}	Output Capacitance	$V_{CB} = 10V$, $I_E = 0A$, $f = 1MHz$		50		pF

Typical Characteristics




Figure 1. Static Characteristic




Figure 2. DC Current Gain




Figure 3. Base-Emitter Saturation Voltage Collector-Emitter Saturation Voltage




Figure 4. Collector Output Capacitance




Figure 5. Base-Emitter On Voltage






Figure 6. Safe Operating Area


©2001 Fairchild Semiconductor Corporation Rev. C1, December 2001

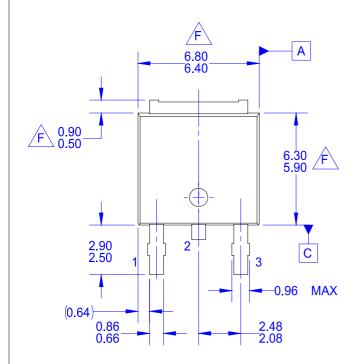




NOTES:UNLESS OTHERWISE SPECIFIED

- A) NOT COMPLIANT TO JEDEC TO-252 VARIATION AB
 B) ALL DIMENSION ARE IN MILLIMETER
 C) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS
- LAD PATTERN PER IPC7351A ATANDARD D) TO228P991X239-3N
- E) DRAWING FILE NAME:MKT-TO252D03REV4.
 F) DOES NOT COMPLY JEDEC STANDARD VALUE.
- G) FAIRCHILD SEMICONDUCTOR.

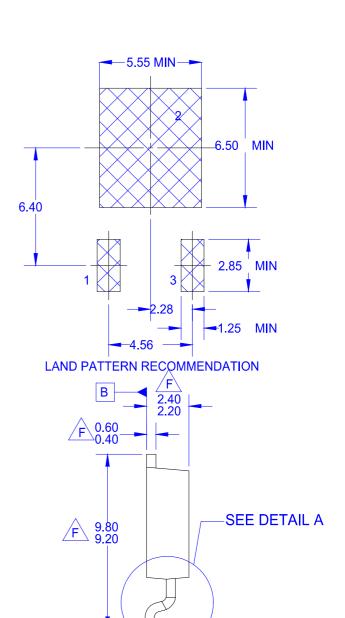

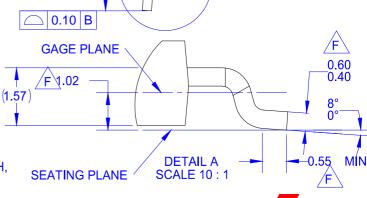



ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdt/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see any inability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and ex

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative